


SCC-B9374 1/3" High Resolution, Day/Night, Vandal Resistant, Vari-Focal, IR Dome Camera



Dimensions (unit : in)

Rear Panels

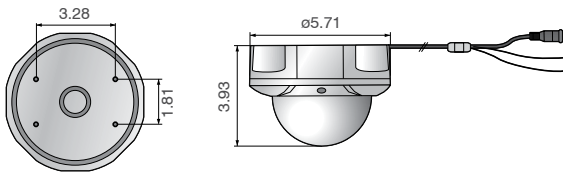

• DAY/NIGHT FUNCTION

The Day/Night function automatically switches to color mode during the day and to black and white mode during the night depending on the level of illumination which makes it ideally suitable for 24/7 surveillance.



Day



Night

• VANDAL AND WEATHER RESISTANT (IP66)

Built for the toughest conditions, the SCC-B9374 is suited for external installation, thanks to its special structure that resists water and dust



Weather Resistant



Vandal Resistant

Summary

The SCC-B9374 Vari-Focal dome with infrared illumination is the perfect choice for installations where lighting at night is very low or does not exist at all. The IR dome provides sharp and clear pictures even with no light present.

Features

- 1/3 Inch Super HAD CCD
- 540TV Lines (Color), 570TV Lines (B/W) Resolution
- Minimum Scene Illumination: 0.4 Lux Color / 0 Lux B/W @ 15IRE, (F1.2)
- 3.8~9.5mm F1.2 Lens Built-in Vari-Focal Aspherical DC Auto Iris
- DIP Switch Control of Color & B/W Changing Time
- 18 IR LED with CDS Photocell Auto Switch
- 20ft range effective IR illumination
- True 3-Axis Gimbal Bracket (2-Pan, 2-Tilt)
- Vandal Resistant & Weather Resistant Housing (IP66)
- AC24V/DC12V

Recommended Accessories

GV-TRAN-24-40LED, 24VAC, 40VA, Class II plug in transformer

*See accessories page for more options

Specifications

Camera Type	Color/BW	IR Dome Camera
Image	Device	Interline Transfer Type Sony CCD
	Size	1/3"
Scanning	Pixels - Effective	768 (H) x 494 (V) - 380K Pixels
		525 lines, 2:1 Interlace
Min. Scene Illumination	Color	0.4 Lux @ 15IRE (F1.2) 1.3 Lux @ 50IRE (F1.2)
	B/W	0 Lux @ 15IRE (F1.2) 0 Lux @ 50IRE (F1.2)
Shutter Speed		1/60 sec
Functions	AGC	Built-in
	IR	18 pcs LEDs
	CDS	Day/Night Switching
Lens	Size	3.8~9.5mm Vari-focal, DC AutoIrisF1.2
Resolution	Horizontal	540(Color) TVL / 570(B/W) TVL
Video Output	VBS 1.0Vp-p	VBS 1.0Vp-p (75-Load)
S/N Ratio	S/N Ratio	Greater than 48dB (AGC off)
Environmental Conditions	Operating Temperature	14° ~ 122°F (-10° ~ 50°C)
Power	Power Requirement	12VDC / AC24V
	Power Consumption	Normal: 160mA, 2.5W (LED OFF) 5.0W (LED ON)
Physical Specification	Dimensions (exL)	5.71 x 3.94 in / 145 x 100 mm
	Weight	3.1 lb / 1.4kg